


EAZ-LIFT SRPING CORPORATION
TORSION TUBE INSTALLING INSTRUCTIONS

KIT NO: 9007

STEP BUMPER TUBE HITCH

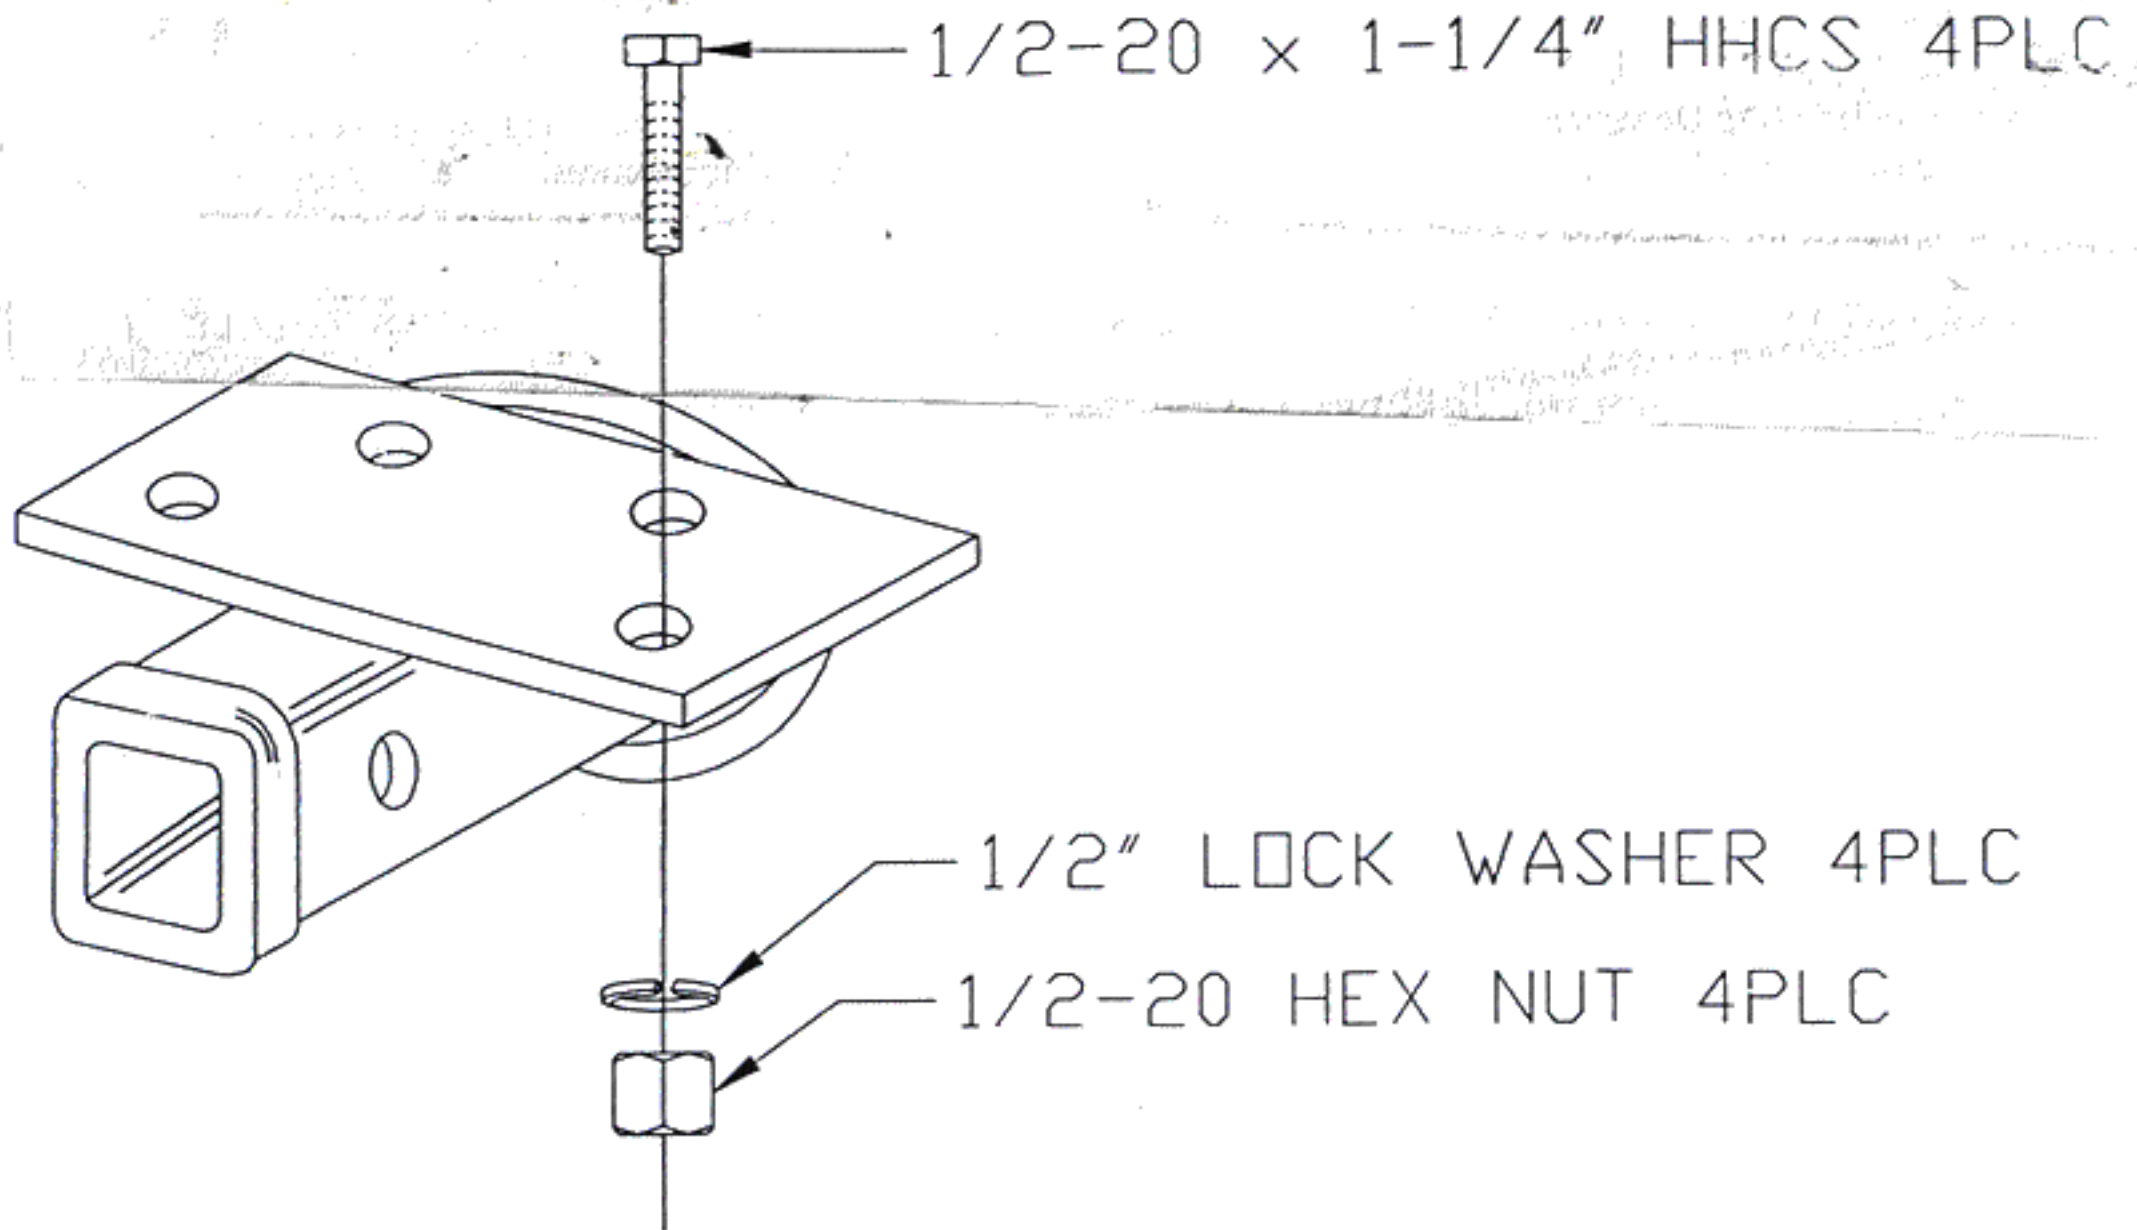

*****READ INSTALLING INSTRUCTIONS AND CONSULT CUSTOMER BEFORE BEGINNING WORK.**

1. CENTER RECEIVER ON UNDER SIDE OF BUMPER.
2. USING HOLES IN PLATE AS GUIDE, DRILL FOUR 9/16" HOLES IN BUMPER.
3. INSTALL RECEIVER USING FOUR 1/2-20 x 1-1/4" HHCS, FOUR 1/2" LOCKWASHERS, AND FOUR 1/2-20 HEX NUTS.
4. TIGHTEN ALL FASTENERS TO REQUIRED TORQUE.

NOTE: RECEIVER PLATE HOLES WILL MATCH IN SOME BUMPERS.

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. SOME KITS MAY REQUIRE MODIFICATIONS OF EXHUST SYSTEM, SPARE TIRE LOCATION, TRIM OR REMOVAL OF FASCIA

THIS PRODUCT COMPLIES WITH SAFETY SPECIFICATIONS FOR CONNECTING DEVICES AND TOWING SYSTEMS OF THE STATES OF NEW YORK, MARYLAND AND NEW JERSEY. VESC REGULATION V-5 AND CANADIAN C. S. A. D-264

WARNING: By towing a trailer you change the handling characteristics of the tow vehicle. Conditions you may encounter can cause sudden trailer sway. When used properly, the EAZ-LIFT WEIGHT DISTRIBUTION HITCH and SWAY CONTROL dampen and reduce trailer sway, and by re-distributing trailer tongue weight reduce unsafe towing vehicle handling. **IMPORTANT:** Short wheel base vehicles may induce sway when towing a trailer.

USE EXTREME CAUTION: To determine whether or not a particular tow vehicle and trailer combination is suitable, you should always refer to driver's manual or user's guide provided by the vehicle and trailer manufactures and seek the recommendations and advice of the trailer dealer.

The United States Department of Transportation, the American Automobile Association, and various recreational vehicle associations and RV MAGAZINES also offer good advice on safe trailer towing practices.

IMPORTANT: CONSULT YOUR OWNERS MANUAL ON LIMITATIONS FOR YOUR OWN VEHICLE

WARNING: DO NOT WELD OR DRILL HOLES IN CROSSMEMBER

WARNING: IF BOLTS ARE SUBSTITUTED, THEY MUST BE GRADE FIVE OR BETTER.

GRADE: 5 5/8" 115 FT -LBS 1/2" 75 FT-LBS 7/16" 55 FT-LBS 3/8" 35 FT-LBS

GRADE: 8 12mm 65 FT-LBS 10mm 35 FT-LBS 8mm 20 FT-LBS

WEIGHT DISTRIBUTION HITCH

MGTWR: NONE LBS

MVHC: NONE LBS

WEIGHT CARRYING HITCH

MGTWR: 5,000 LBS

MVHC: 500 LBS

KIT NO: 9007

9-20-99

CARTON NO:

PACKING LIST:

<u>DESCRIPTION:</u>	<u>PART NO.</u>	<u>QTY</u>
CROSSMEMBER	9007	1
BOLT KIT	99007	1
INSTALLING INSTRUCTIONS		1
WARRANTY CARD		1
LABEL NO.	BE9000	

<u>BOLT KIT NO:</u>	<u>99007</u>
<u>DESCRIPTION:</u>	<u>QTY.</u>

1/2-20 x 1-1/4" HHCS	4
1/2-20 HEX NUT	4
1/2" LOCK WASHER	4

CROSSMEMBER SPECS.

LENGTH:

TUBE (S): QUANTITY 1

RECEIVER TYPE: STR - 6" 1

LABEL: EAZ-LIFT 1

RECEIVER SPEC. 1

EAZ-LIFT SPRING CORPORATION

P.O. BOX 489 10618 KESWICK ST., SUN VALLEY, CA. 91353-0489

911 S. FIFTH AVE., MANSFIELD, TX 76063

1318 W. BRISTOL, ELKHART, IN 46514

80 BESSEMER ROAD, LONDON, ONTARIO, CANADA. N6E 1R1

TEL: (800) 636-9412

TEL: (800) 458-0894

TEL: (800) 634-8152

TEL: (519) 681-1410